




DPV-A


Vivaldi Dual Polarized
0.7 - 12 GHz

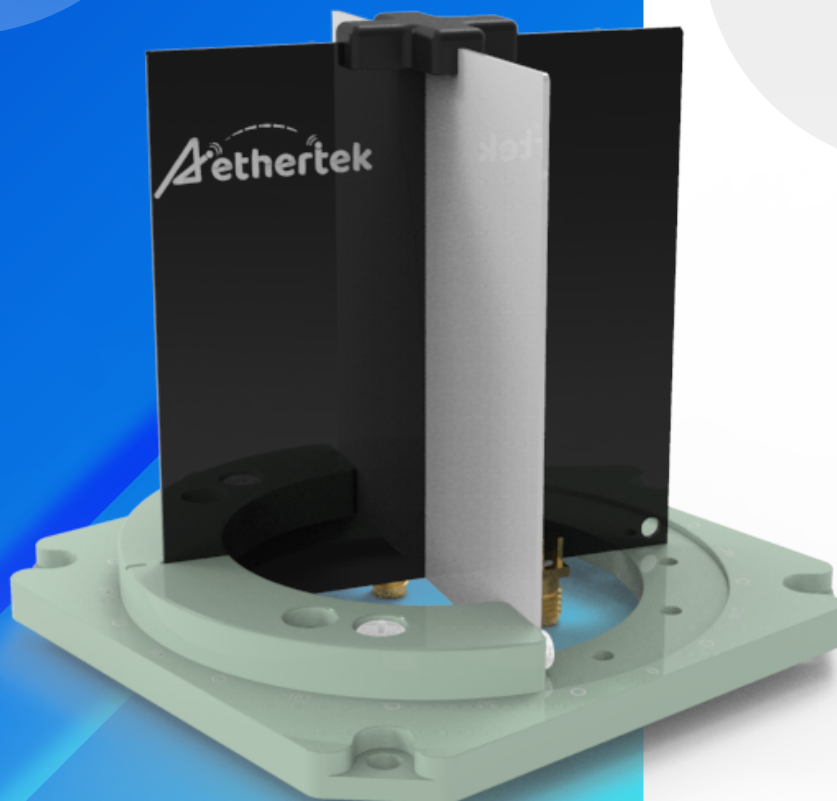

*DATA
SHEET*

DPV-A

Vivaldi Dual Polarized 0.7 - 12 GHz

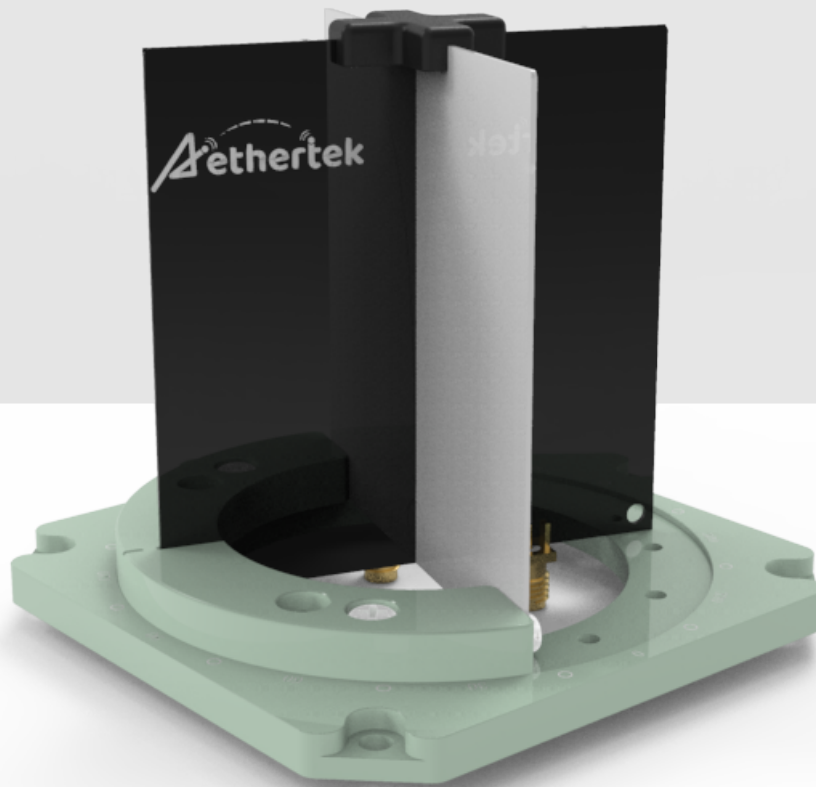

1. Features

- Capable of Transmitter radiated power testing and Receiver sensitivity testing
- Wide bandwidth design for 5G FR1, 4G LTE, WLAN, Bluetooth, GPS, LoRa, Z-wave, Zigbee application
- Dual polarization design for all kinds of incident wave receiving
- Compact size for compact shielding box






2. Specifications

Model A	
Operating Frequency	0.7 GHz ~ 12 GHz
VSWR	3 : 1
Isolation	20dB @0.7GHz~6GHz, 15dB @6GHz~12GHz
Polarization	Dual, Vertical and Horizontal
Impedance	50 Ohm
Dimension	L100 mm x W120 mm, thickness = 0.8 mm
RF Connector	SMA-F



3. Dimension

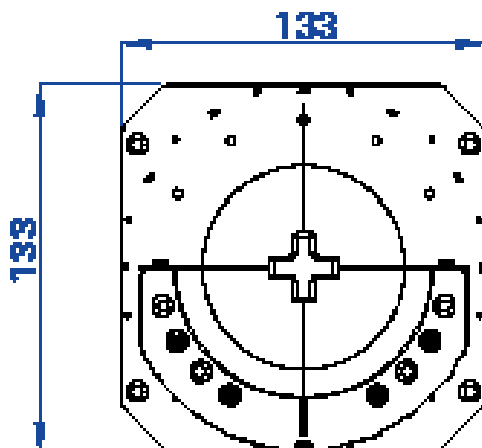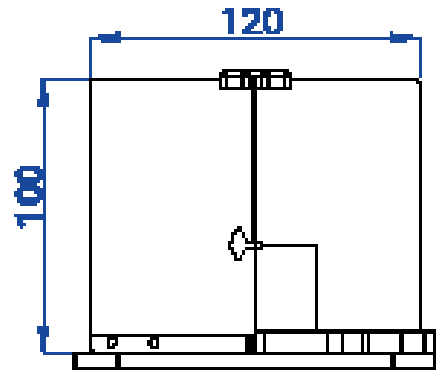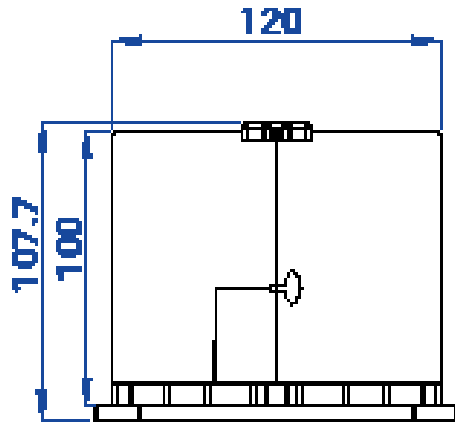


DPV-A

Vivaldi Dual Polarized
0.7 - 12 GHz



DATA SHEET

Contact us to experience our 5G innovative solutions!



✉ contact@aether-tek.com

☎ +886-2-2658-2068

📍 9F No. 607, Ruiguang Rd., NeihuDist, Taipei City 114, Taiwan